
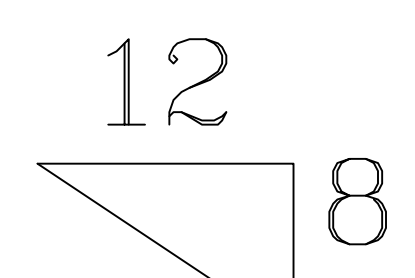


MINIMUM 25 YEAR ASPHALT SHINGLED ROOF (COLOR SELECTED BY OWNER) OVER 15# FELT ON 1/2" OSB SHEATHING W/ STAGGERED JOINTS W/ ICE AND WATER SHIELD 5' UP AT ALL EAVES AND AT VALLEYS

CONTINUOUS RIDGEVENT

MINIMUM R50 BLOWN CELLULOSE ATTIC INSULATION OVER VAPOR AND MOISTURE BARRIER- VENT SHIELDS TO CHANNEL AIR TO RIDGE VENT FROM BLOCK VENTED SOFFIT



FACTORY ENGINEERED TRUSS RAFTERS @ 2' OC BUILT TO WISCONSIN CODE SPECIFICATIONS

2x12 & 1x6 FASCIA COVERED W/ METAL FASCIA & VENTED ALUMINUM SOFFIT

LAP SIDING OVER 1X4 VERTICAL STRIPPING & 3" EXTRUDED POLYSTYRENE R14

2'

8'-1 1/8"

1 1/2" - 3/4"

8'

5/8" DRYWALL CEILINGS AND 1/2" DRYWALL WALL FINISHES TAPED AND SPRAY TEXTURED W/ 2 COATS LATEX FINISH PAINT

2x4 #2 SPF STUDWALLS @16" OC W/ 2x4 BOTTOM PLATE AND DOUBLE 2x4 TOP PLATE SHEATHED W/ 1/2" OSB, W/ SELF ADHERING MEMBRANE- INSULATED W/ 3-5/8" FIBERGLASS BATTS R13 AND 3" EXTRUDED POLYSTYRENE ON THE OUTSIDE, STRIPPED W/ 1X4 TO ACCEPT SIDING

20" FLOOR TRUSSES (ENGINEERING AND LAYOUT IS RESPONSIBILITY OF VENDOR)

3" EXTRUDED POLYSTYRENE R14 EXTENDS TO FOOTING

REMOTE (Residential Exterior Membrane Outside Insulation Technique) WALL SECTION

SCALE: 3/4" = 1'-0"

SCALE/NOTED	1/11/13
DATE	BL
NAME	BL
DWG. NO.	13-
CAD FILE	
REVISIONS	0

REMOTE  
(Residential Exterior Membrane Outside Insulation Technique)  
WALL SYSTEM SECTION

**BESTIMATE LLC**  
http://bestimatellc.com  
bob@bestimatellc.com  
714 E Ninth St  
Marshfield, WI 54449  
715-506-0040

